


Product Overview



Product Specification Sheet


DUH602 – 18V Brushless Hedge Trimmer 600mm

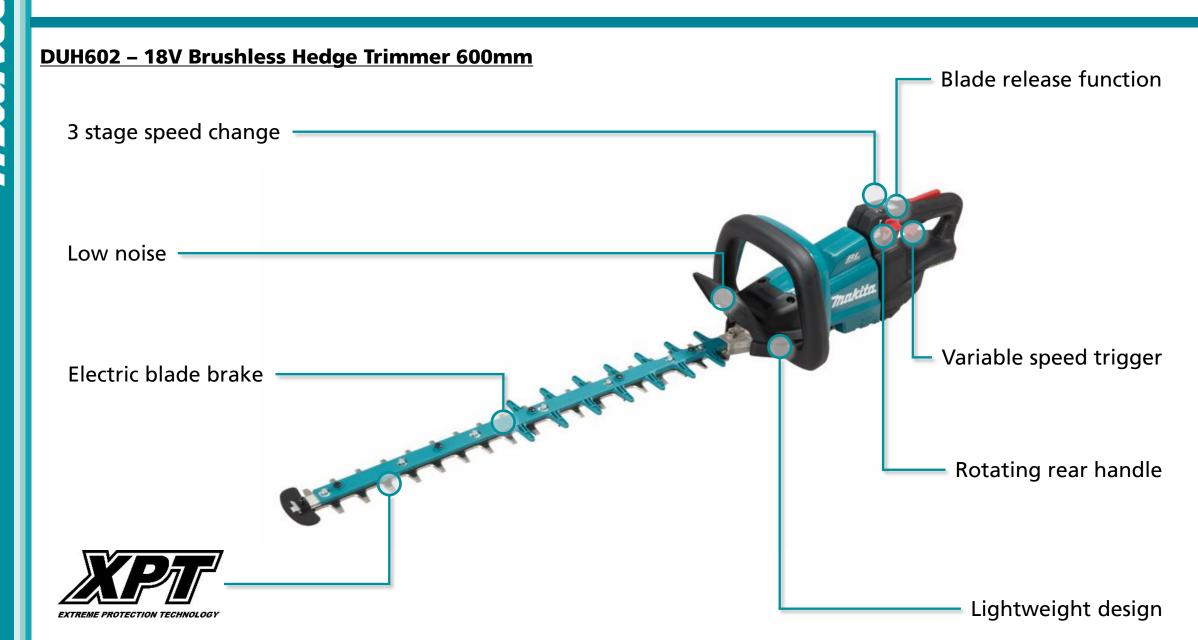

21.5mm
600mm
90dB
Hi: 0 - 4,400spm Med: 0 - 0-3,600spm Low: 0 - 2,000spm
1,121mm
3.9kg
4.5kg
18V

- 3 Stage speed change control panel allows adjustable stroke speed according to operations and the environment
- **Low noise -** noise rating of 90dB
- Electric blade brake quickly brings the blades to a smooth stop so the user can safety resume operation
- XPT extreme protection technology, is an advanced series of seals and channels to direct dust and moisture away from critical components
- Blade release function if the blade was to become jammed the user can press the release button temporarily reversing the blade direction
- Variable speed trigger as well as the 3 stage speed change the user can have full control of the blade speed from the variable speed trigger, similar to a petrol trimmer
- **Rotating rear handle** handle can be positioned in 5 positions, 0°, 45° and 90° left and right for maximum comfort in various applications
- Lightweight design at only 4.5kg with a 6.0Ah battery compared with the equivalent petrol model at 5.0kg

Product Overview

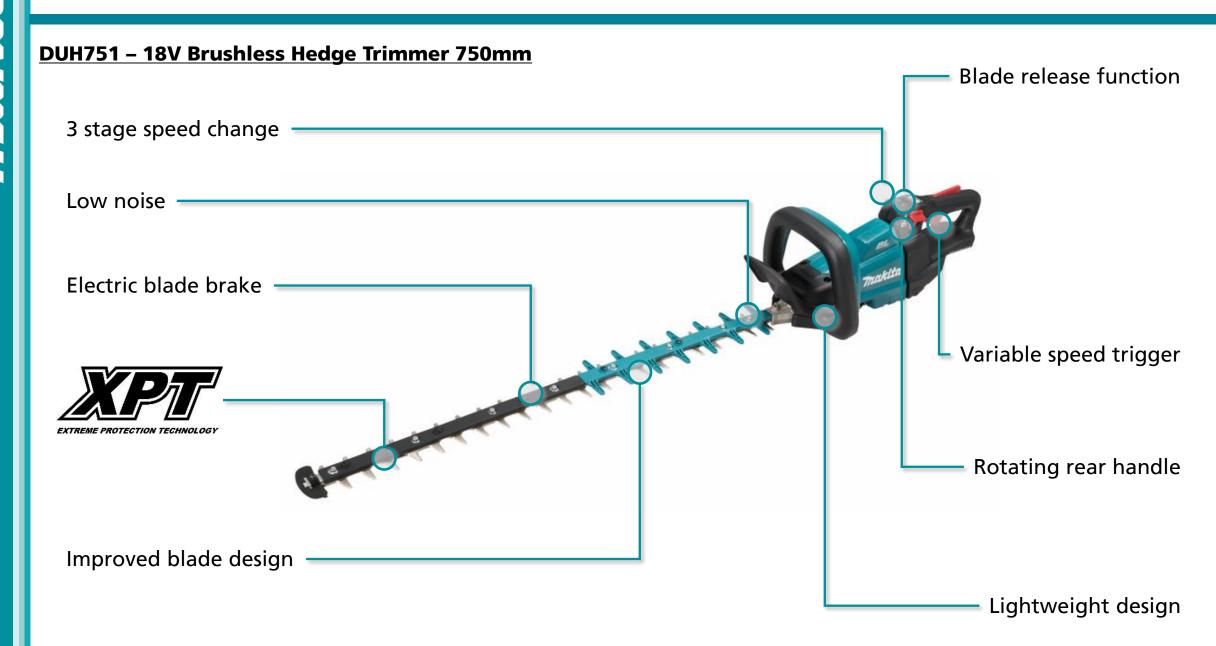

Product Specification Sheet

DUH751 – 18V Brushless Hedge Trimmer 750mm



Max. branch diameter	23.5mm
Blade length	750mm
Noise	93dB
No load speed	Hi: 0 - 4,400spm Med: 0 - 0-3,600spm Low: 0 - 2,000spm
Overall length	1,261mm
Skin weight	3.9kg
Weight (with battery)	4.5kg
Voltage	18V

- **3 Stage speed change** control panel allows adjustable stroke speed according to operations and the environment
- Low noise noise rating of 93dB
- Electric blade brake quickly brings the blades to a smooth stop so the user can safety resume operation
- XPT extreme protection technology, is an advanced series of seals and channels to direct dust and moisture away from critical components
- Improved blade design new shape blade, designed specifically for cordless trimmers reduces resistance and increases runtime
- Blade release function if the blade was to become jammed the user can press the release button temporarily reversing the blade direction
- Variable speed trigger as well as the 3 stage speed change the user can have full control of the blade speed from the variable speed trigger, similar to a petrol trimmer
- Rotating rear handle handle can be positioned in 5 positions, 0°,
 45° and 90° left and right for maximum comfort in various applications
- Lightweight design at only 4.5kg with a 6.0Ah battery compared with the equivalent petrol model at 5.0kg

Advantages

Performance



18V Brushless Motor provides up tp 4,400spm

Convenience



Rotating rear handle for maximum comfort in a variety of applications

Innovation



Anti-vibration structure reduces vibration for comfortable prolonged use

Comfort



24% lighter in weight then the petrol equivalent

Product Replacement

	DUH551 – Discontinued	DUH602
	Chiling the second of the seco	
Max. branch diameter	18mm	21.5mm
Blade length	550mm	600mm
Noise	81.5dB	90dB
No load speed	1,000 – 1,800spm	2,000 – 3,600 – 4,400spm
Overall length	1,065mm	1,121mm
Skin weight	3.9kg	3.9kg
Weight (with battery)	5.1kg	4.5kg
Voltage	36V (18Vx2)	18V

Our Range

	DUH751	DUH602	DUH507	DUX60PH
	O. C.	O THE RESIDENCE OF THE PARTY OF	- Land of the land	
Motor	Brushless	Brushless	Brushed	Brushless
Max. branch diameter	23.5mm	21.5mm	15mm	21.5mm
Blade length	750mm	600mm	500mm	490mm
Noise	93dB Lo: 0-2,000spm	90dB Lo: 0-2,000spm	87dB	83.7dB sound pressure
No load speed	Med: 0-3,600spm High: 0-4,400spm	Med: 0-3,600spm High: 0-4,400spm	1,350spm	4,000spm
Overall length	1,261mm	1,121mm	925mm	3,715mm
Skin weight	3.9kg	3.9kg	2.4kg	7.5kg
Weight (with battery)	4.5kg	4.5kg	3.0kg	8.7kg
Voltage	18V	18V	18V	18Vx2

Accessories

Standard Accessories		
- Thakita.	458414-1	BLADE COVER 600
Thakita	458415-9	BLADE COVER 750
O The state of the	191R57-1	Standard Blade Assembly 600mm
See a se	191R54-7	Low friction blade assembly 750mm

Optional Equipment			
O Proportion of the Parket	191R53-9	Low friction blade assembly 600mm	
Grand and the state of the stat	191R58-9	Standard Blade Assembly 750mm	