

# 216mm (8.5") Slide Compound Saw




LS0815FL



# Product Objectives

- Designed to suit the needs of carpenters, finish carpenters, flooring installation and joiners
- Develop a 216mm slide compound mitre saw with both an LED job light and laser marker for increased visibility and accurate straight cutting

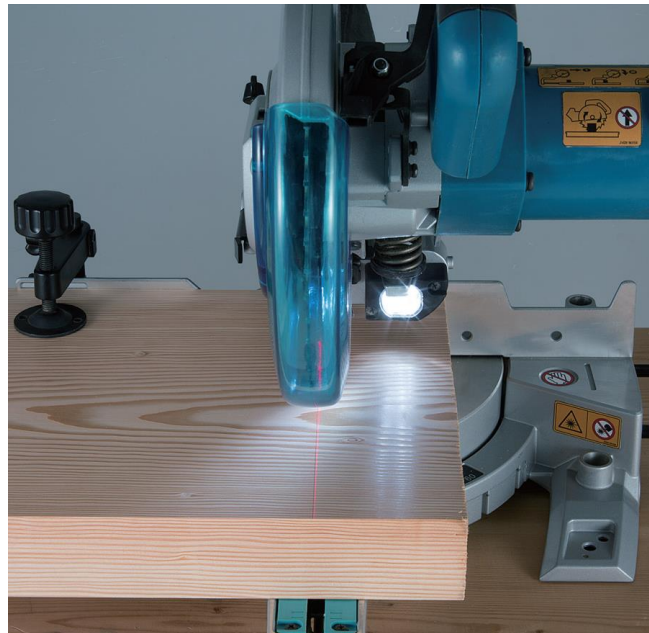

# Product Overview

**Makita**

Large cutting capacity


Transport handle

Laser marker

Soft start

Sliding sub fence

LED Joblight

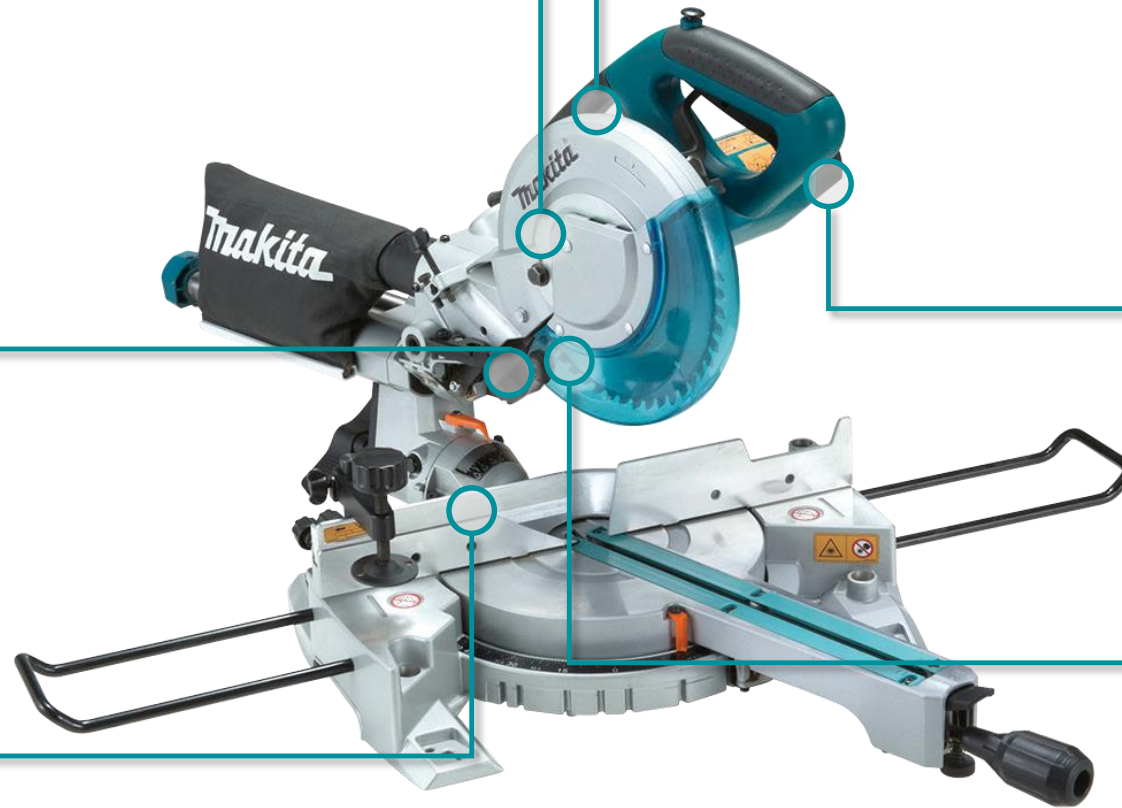

# Product Specification Sheet



- **Large cutting capacity** – maximum cutting depth 65mm at 90 degrees and 50mm and 45 degree bevel
- **Laser marker** – accurately marks the cut line on the material and operates from the same power source as the motor, therefore doesn't need batteries
- **Sliding sub fence** – allows the material being cut to be sufficiently supported by the subfence at all angles from 90 to 48 degree bevel
- **Transport handle** – for easy transportation to and from the jobsite
- **Soft start** – minimised the start up force upon start up. Protecting the user and internal components from injury or damage
- **LED Joblight** – provides bright and wide illumination of the workpiece allowing for safe and accurate cutting

Continuous rating input	1,400W
No load speed	5,000rpm
Saw blade	216mm (8.5")
Soft start	Yes
Laser marker	Yes
LED joblight	Yes
Power supply cord	2.5m
Weight	14.2kg

# Product Specification Sheet



Bevel Angle:      48° Left      0 °      5° Right

Bevel Angle	Miter Angle	Height x Width
0°	0°	65 x 305mm
	45° left and right	65 x 215mm
	60° Right	65 x 150mm
45° Left	0°	50 x 305mm
	45° Left and right	50 x 215mm
5° Right	0°	60 x 305mm

# Advantages




## Performance




Maximum cutting capacity  
65 x 305mm

## Accuracy

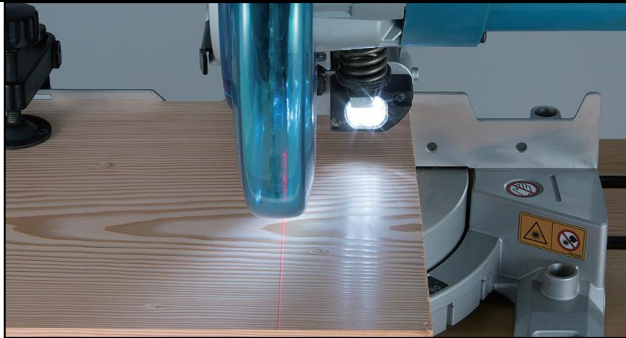

Laser marker and LED joblight for exact cutting

## Control

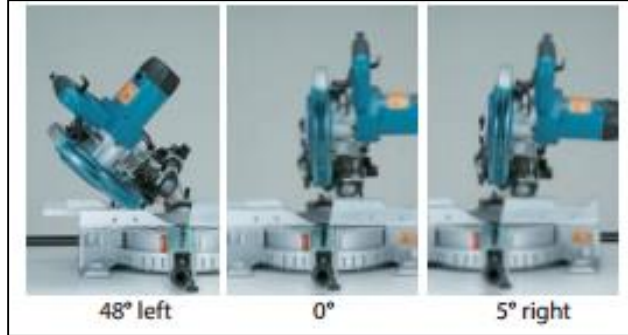

Bevel capacity  
48° left and 5° right

## Efficiency



High dust extraction rate  
Catching up to 88% of dust with bag provided



# Our Range







	LS0714	LS0815FL	LS1040	LS1016	LS1018L	LS1216	LS1221	LS1440
		<b>NEW</b> 						
Max. cutting capacity: mm	52x300	65x305	90.5x95	91x297	91x310	107x363	98x153	122x152
Continuous rating input: W	1,010	1,400	1,650	1,510	1,430	1,650	1,650	1,380
No load speed: rpm	6,000	5,000	4,600	3,200	4,300	3,200	4,000	3,200
Saw blade: mm	190 (7.5")	216 (8.5")	255 (10")	260 (10.2")	260 (10.2")	305 (12")	305 (12")	355 (14")
Soft start:	No	Yes	No	Yes	Yes	Yes	No	No
Laser marker:	No	Yes	No	No	Yes	No	No	No
LED joblight:	No	Yes	No	No	Yes	Yes	No	No
Power supply cord: m	2.0	2.0	2.5	2.0	2.0	2.0	2.0	2.0
Weight: kg	12.5	14.2	11.0	23.6	19.8	26.6	16.5	34

# Accessories



## Standard Equipment

	B-39497	216mm Saw blade 216x25.4x48T
	JM23510009	Vertical vise
	JM23510010	Dust bag
	762001-3	Triangular rule
	JM23100197	Box wrench 13-3
	JM23000127	Holder set

## Optional Equipment

	B-15257 B-15263	<u>BlueMak Blades</u>  216x30x24T 216x30x60T
	B-30879 B-30885	<u>Knot and Nail Cutting Blades</u>  216x30x24T 216x30x40T
	B-15431	<u>Silencer Blades</u>  216x30x80T
	B-37605	<u>Laminate Cutting Blades</u>  216x30x72T
	B-15621 191897-9	<u>Aluminium Cutting Blades</u>  216x30x64T Paraffin Wax Tube 100gms
	B-21060	30mm to 25.4mm Saw Blade press fit bore spacing ring