

m

AN61

Pneumatic 32-65mm Construction Coil Nailer

Thakita.

Sector of H Data



Product Objectives

- Designed to perform tasks such as framing, fencing, interior & exterior nailing
- AN613 replaces AN611








Product Overview

Actuation mode selector

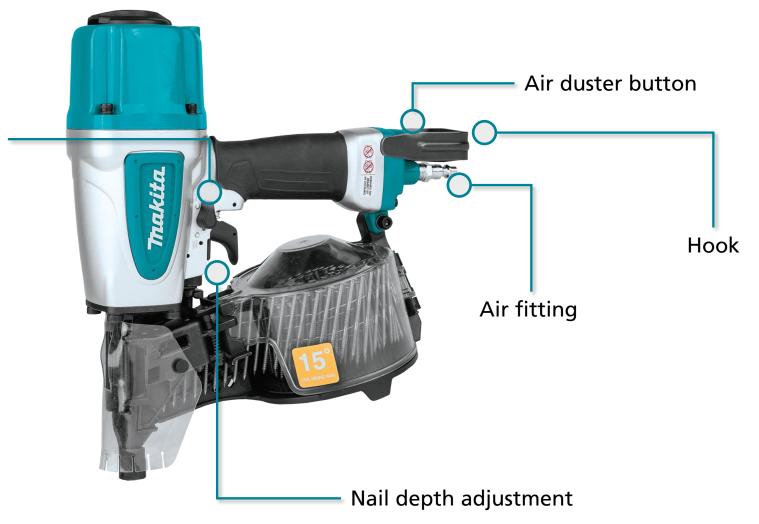

Product Specification Sheet



Fastener range	Plastic: 32 - 65mm / Wire: 38 - 65mm
Operating air pressure	70 - 120PSI
Magazine capacity	200 - 300pcs
Fastener type	15°, 2.3 - 2.5mm diameter
Overall length	319mm
Net weight	2.2kg

- Actuation Mode Selector select operation mode: single sequential actuation mode (single fire) or contact actuation mode (bump fire).
- Nail depth adjustment to adjust the depth of nailing, turn the adjuster. The guide on the tool shows which direction for deep or shallow depth. If nails are still not driven deep enough after adjustment, increase the air pressure. If nails are too deep after adjustment, decrease the air pressure.
- Air duster helps clean dust and debris off material. Press the button on the grip end to engage.
- Hook convenient for hanging the tool temporarily. To change the hook position, remove the hex socket bolt and switch hook direction.
- **Easy to-grip handle** Anti-slip ribs added to the grip rubber provides more control.
- Nose adapter use the adapter to prevent the surface of the workpiece from being scratched or damaged.

Advantages

Power



70-120 PSI operating air pressure

Convenience



Air duster to blow away dust and debris

Precision



Easy to use depth adjustment

Control



2 mode selection switch: single fire or bump fire

Product Replacement

	AN611 - Discontinued	AN613	
Fastener range	Plastic: 32 - 50mm Wire: 32 - 65mm	Plastic: 32 - 65mm / Wire: 38 - 65mm	
Operating air pressure	65 - 120PSI	70 - 120PSI	
Magazine capacity	200 - 400pcs	200 - 300pcs	
Fastener type	15°, 2.1 - 2.5mm dia. (plastic or wire collated)	15°, 2.3 - 2.5mm diameter	
Overall length	317mm	319mm	
Net weight	2.2kg	2.2kg	



Our Range							
	AF353	AF506	AF601	AF635	AT638A	AN613 - NEW	AN943
Fastener range	15-35mm	15 - 50mm	25 - 64mm	32 - 64mm	13 - 38mm	Plastic: 32 - 65mm / Wire: 38 - 65mm	50 - 90mm
Operating air pressure	65-100psi	70 - 120psi	70 - 120psi	70 - 120psi	70 – 120psi	70 - 120PSI	65 – 120psi
Magazine capacity	130pcs	100pcs	100pcs	100pcs	100pcs	200 - 300pcs	60 - 84pcs
Fastener type	23Ga	18 Ga	16 Ga	15 Ga	18 Ga	15°, 2.3 - 2.5mm dia.	31° (D-Clipped head)
Overall length	208mm	250mm	304mm	339mm	230mm	319mm	455mm
Net weight	0.9kg	1.3kg	1.7kg	1.8kg	1.2kg	2.2kg	3.9kg

Accessories

Standard Accessories				
	HY00001072	Nose Adapter		
	181434-7	Oil		
		Hex Wrench 3		
		Hex Wrench 4		
		Hex Wrench 5		