


Product Objectives

- Designed to suit the needs of metal fabricators, installation and fit out
- Engineered for cutting tight curves without damaging the material.
 The specially designed blades have a minimum cutting radius of only 30mm



Product Overview

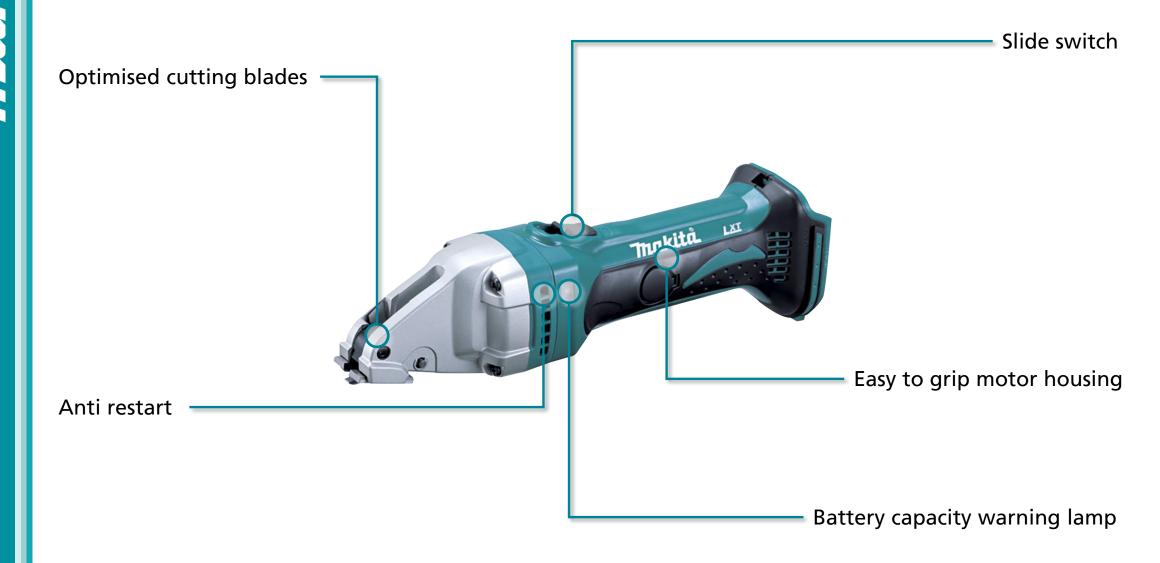

Product Specification Sheet



Max. cutting capacities in mild steel	1.0mm
Max. cutting capacities in stainless steel	0.7mm
Max. cutting capacities in aluminium	2.5mm
Minimum cutting radius	30mm
Width of cut	5mm
No load speed	4,300spm
Overall length	364mm
Skin weight	1.4kg
Weight (with battery)	2.0kg
Voltage	18V

- **Optimised cutting blades** specially designed blades allow users to cut with an extremely tight radius of only 30mm, without deforming the material
- Anti-restart motor does not start up if battery is inserted with the switch locked on. In the case the lamp will flash and trigger switch must be returned to the off position
- Slide switch easy to operate slide switch with lock on function for comfortable continuous use
- Easy to grip motor housing designed with a small housing circumference for easy handling, and a rubberised grip for more comfort and control
- Battery capacity warning lamp when remaining battery capacity decreases below the tools minimum performance requirement the motor stops and lamp will turn solid red

Advantages

Performance



Designed for tight a cutting radius

Power



Powerful LXT motor providing 4,300rpm for fast cutting with a maximum 1.0mm capacity

Safety



Cutting chips can only be discharged in one direction for increased safety

Control



Small housing circumference and soft grip provides increased control while cutting

Our Range

	NEW – DJS101	DJS161	DJS130
		martin was	Lat
Max. cutting capacities in mild steel	1.0mm	1.6mm	1.3mm
Max. cutting capacities in stainless steel	0.7mm	1.2mm	1.0mm
Max. cutting capacities in aluminium	2.5mm	2.5mm	N/A
Minimum cutting radius	30mm	250mm	N/A
Width of cut	5mm	5mm	5.5mm
No load speed	4,300spm	4,300spm	2,800spm
Overall length	364mm	362mm	350mm
Skin weight	1.4kg	1.4kg	1.7kg
Weight (with battery)	2.0kg	2.0kg	2.3kg
Voltage	18V	18V	18V

Accessories

Standard Accessories				
	783201-2	Hex wrench 3		

Optional accessories				
611	792536-0	Side blade set		
0 90% 0	792537-8	Center blade		
The state of the s	BL1815N to BL1860B	18v Li-Ion Batteries BL1815N 1.5Ah to BL1860B 6Ah		
	DC18RC DC18SD	240V Rapid Charger 240V Optimum Charger		
	DC18RD	240V Dual Port Rapid Charger		
makita	DC18RE	240V Dual Port Multi Voltage Rapid Charger		